
Belt Foam Bar Attachments



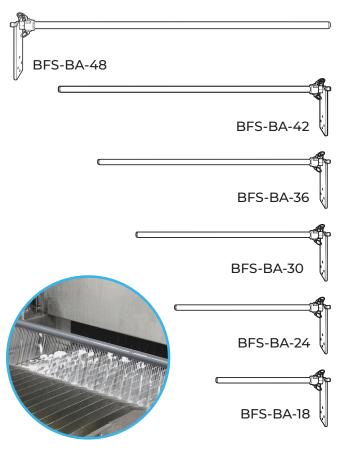

The Good Stuff

Save on cost and labor

Belt foam bars save time, chemical costs, and labor, no more hand-spraying lines

Complete belt coverage

Foam offers visual confirmation of up to 4 ft. of chemical coverage on full belt rotation

Work with wall and portable foam units
Belt foam bars connect to your FOAMit foaming
equipment with quick-connects



Features

- Belt foam bars make belt cleaning quicker and more affordable
- · Foam cleaning reduces chemical and water consumption
- Available in six sizes:
 - · 18, 24, 30, 36, 42, And 48 inches.
- · Consistent visual coverage of cleaning chemistry
- · Easy mount bracket to conveyor
- · Complete coverage on a belt revolution
 - · Can clean the top surface and inside of belts
- · Can be used as part of the clean-in-place process

Industries

- · Food and beverage
- · Industrial



how to buy

Specifications

٠	Output volume	20-30 gal/min (75.7-113.6 l/min)
		with 3/4 in. (19 mm) hose
	Flow rate	2-2.25 gal/min (7.6-8.5 l/min)
		with 7// in (19 mm) has

Coverage area......18-48 in. (0.5-1.2 m) width beneath the bar

Requirements

•	Liquid temperature range	40-100°F (4.4-37.8°C)
	Equipment reqs	requires connection to a FOAMit unit
		with ¾ in. (19 mm) discharge hose
		and a $\frac{1}{2}$ in. FPT discharge ball valve

Chemical compatibility......chemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.