


belt foam bar attachments



the good stuff

- **save on cost and labor**
belt foam bars save time, chemical costs, and labor, no more hand-spraying lines.
- **complete belt coverage**
foam offers visual confirmation of up to 4ft of chemical coverage on full belt rotation.
- **work with wall and portable foam units**
belt foam bars connect to your FOAMit foaming equipment with quick-connects.

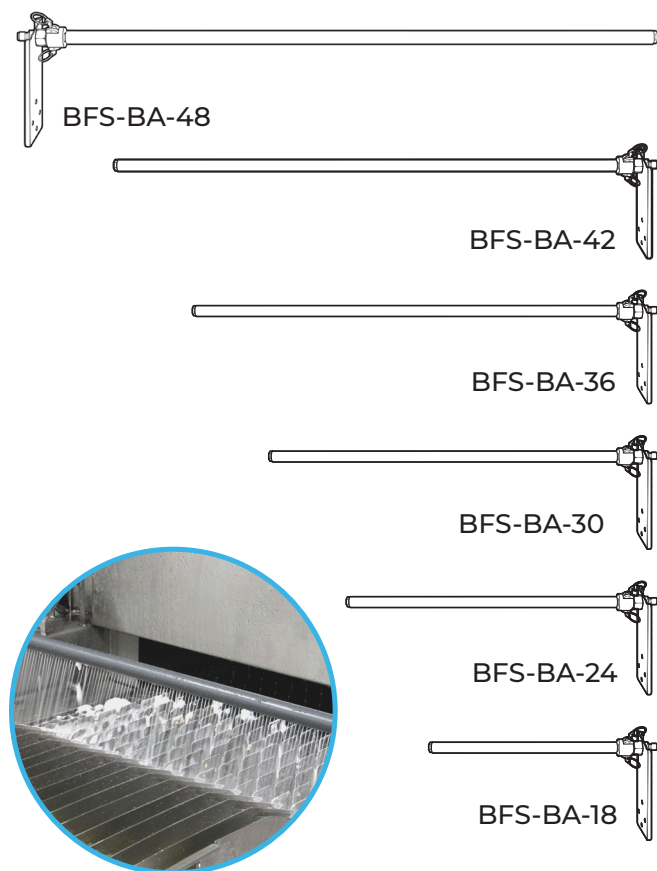

features

- belt foam bars make belt cleaning quicker and more affordable
- foam cleaning reduces chemical and water consumption
- available in six sizes:
 - 18, 24, 30, 36, 42, and 48 inches.
- consistent visual coverage of cleaning chemistry
- easy mount bracket to conveyor
- complete coverage on a belt revolution
 - can clean the top surface and inside of belts
- can be used as part of the Clean-in-Place process

industries

- food and beverage
- industrial



how to buy

specifications

- **output volume** With 3/4 in. (19 mm) hose:
20-30 gal/min (75.7-113.6 l/min)
- **flow rate** With 3/4 in. (19 mm) hose:
2.1-2.6 gal/min (7.9-9.8 l/min)
- **coverage area** 18-48 in. (0.5-1.2 m) width beneath the bar

requirements

- **liquid temperature range** 40-100° F (4.4-37° C)
- **equipment reqs** requires connection to a FOAMit unit with 3/4 in. (19 mm) discharge hose and a 1/2 in. FPT discharge ball valve
- **chemical compatibility** chemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.



800 567 5420 | sales@foamit.com