


twin-line central foam system

CFS-TL

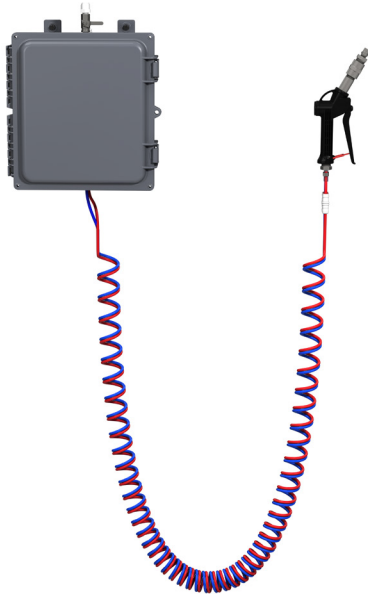

the good stuff

- **secure central chemical location**
keep chemistry secure, away from the production floor; no need to refill containers, chemistry given on demand,
- **no refills**
one location to titrate consistent chemical.
- **on demand chemical**
save time and labor, just grab the hose and foam, it's that simple.

Features

- One central pump distributes pre-mixed solution through header system
 - Pump sold separately
- Powered by compressed air
- Designed for up-close cleaning
- 25 foot (7.6 meter) coiled discharge tubing
- 65° fan tip for increased coverage
- Ability to add padlock to box

options

- pump sold separately

industries

- food and beverage
- manufacturing



how to buy

specifications

- power type central system
- chemical pickup type.....supplied with pre-mixed solution from a central station
- number of products unit can draw fromone product
- discharge line length/diameter:.....25 ft. (7.6 m) coiled, bonded twin-line tubing ¼ in. (6.4 mm outside diameter)
- discharge wand/tip type Polypropylene trigger handle with 65° fan tip
- output distance..... 4-6 ft. (1.2-1.8 m)
- output volume 6 gal/min (22.7 l/min)
- flow rate 1 gal/min (3.8 l/min)
- product height..... 16 in. (40.6 cm)

requirements

- compressed air requirements..... 40-80 psi (3-5 bar) with 5-10 cfm (141-283 l/min)
- liquid temperature range..... 40-100° F (4.4-37° C)
- Central system requirements..... Pre-mixed solution must be supplied by a properly sized header system at 2 gpm and 40 to 80 psi (3 to 5 bar).
- chemical compatibility.....chemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.

