


Chemical Transfer Unit for Up To Five Products



CTX

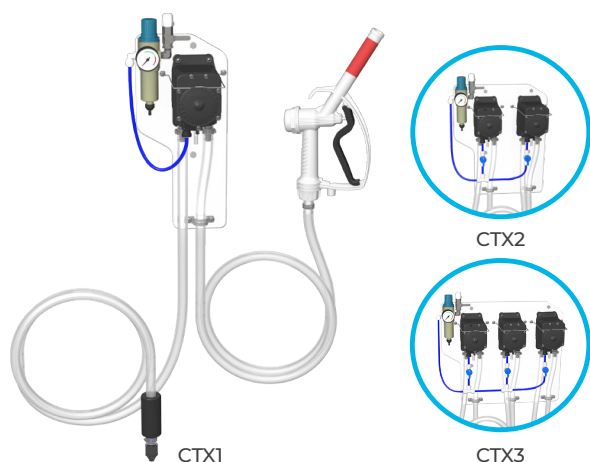

The Good Stuff

- **Small Footprint**
Delivers reliable chemical transfer and saves wall space
- **Heavy duty poly fill gun**
Control the filling of jugs, portable units, and other chemistry containers with ease
- **Configure to your needs**
Order as a single transfer pump or up to five pumps, color coding of wand indicator available

Specs

- Power type compressed air
- Chemical pickup type draws from pre-mixed solution and concentrated product
- Number of products unit can draw from one product per pump
- Suction line length/diameter 8 ft. (2.4 m) clear braid hose with 1/2 in. (12.7 mm) inside diameter
- Discharge line length/diameter 8 ft. (2.4 m) clear braid hose with 1/2 in. (12.7 mm) inside diameter
- Discharge wand/tip type polypropylene fill gun
- Flow rate 3.5 gal/min (13.2 l/min)
- Pump seals Santoprene, Viton, Kalrez

Features

- Transfer each product at up to 3.5 gal/min (13.2 l/min)
- Tool-free pump changes with our quick-change pump bracket
- Chemically-resistant PVC hose
- Weighted suction line with filter and check valve
- Air regulator with filter
- Strain relief on the discharge hose
- Poly fill gun with Hastelloy components for compatibility
- Air-operated diaphragm pump with quick-release hose barbs

Options

- Color coding
 - wand indicator (BL, GN, YL, RD)
- Number of pumps
 - up to 5 pumps (Santoprene, Viton, Kalrez)

Industries

- Institutional
- Food and Beverage
- Manufacturing



How to Buy

Requirements

- Compressed air requirements 20-80 psi (1.4-5.5 bar) with 2 CFM (56.6 l/min)
- Liquid temperature range 40-100 °F (4.4-37.8 °C)
- Chemical compatibility chemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.



800 567 5420 | sales@foamit.com