


Drum Rinse System

DRS

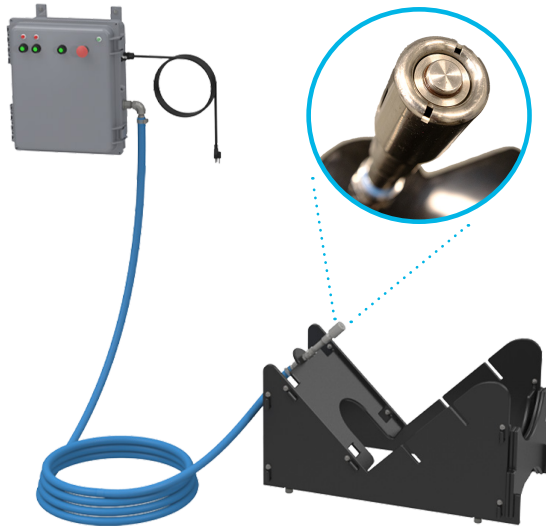

The Good Stuff

- **Saves water and labor**
Reduce your water consumption by over 50% and operate with a push of a button – load a drum, choose a cycle to run, remove the fully rinsed tank, repeat
- **Two rinse options**
Choose between light or heavy rinse options to effectively remove soils – each option cycles 3 times to ensure a total rinse
- **Sustainability**
Available for 15, 30, and 55 gallon tanks, this system makes it easier and efficient to reuse or recycle used tanks

Features

- Designed for a wide range of incoming water pressures and flows
- Durable nozzle for complete and thorough triple rinse
- No timer programming required – works out of the box
- Available in 15, 30, and 55 gallon drum sizes

Options

- Color coding
– Discharge hose – 4 colors (BL, GN, YL, RD)

Industries

- Food and Beverage
- Industrial
- Agriculture

Specs

- **Power type**..... water and electric
- **Discharge line length/diameter** 25 ft. (7.6 m) hose, with 3/4 in. (19 mm) inside diameter
- **Flow rate (produced by unit)** 9-17 gal/min (34.1-64.4 l/min)
- **Timer operation type** repeat cycle (PLC controlled)
- **Water usage**
30 SECOND TRIPLE RINSE CYCLE: 13.5-25.5 gallons (51.1-96.5 liters)
60 SECOND TRIPLE RINSE CYCLE: 27-51 gallons (102.2-193.1 liters)
- **Nozzle type** stainless steel spinner
- **Tubing / fitting size** facility connection to water supply box: 1/2 in. FNPT

Requirements

- **Water requirements**
minimum flow at water source - 9 gal/min (34.1/min)
note: If flow is less than 9 GPM, consider the boosted version
- **Liquid temperature range** 40-190 °F (4.4-87.8 °C)
- **Electrical requirements** 120 VAC at 60 Hz, 2 amps (GFCI protected outlet)
- **Operating voltage** 120 VAC
- **Chemical compatibility** this unit is designed to function with water only



How to Buy



800 567 5420 | sales@foamit.com