


# 55 gallon drum rinse

CSTM-DR55

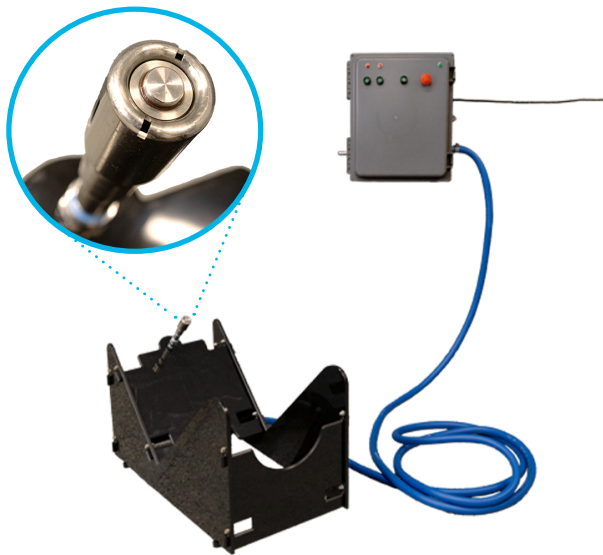

## the good stuff

- **saves water and labor**  
reduce your water consumption by over 50% and operate with a push of a button – load a drum, choose a cycle to run, remove the fully rinsed tank, repeat
- **two rinse options**  
choose between light or heavy rinse options to effectively remove soils – each option cycles 3 times to ensure a total rinse
- **sustainability**  
available for 15, 30, and 55 gallon tanks, this system makes it easier and efficient to reuse or recycle used tanks

## Features

- designed for a wide range of incoming water pressures and flows
- durable nozzle for complete and thorough triple rinse
- no timer programming required – works out of the box
- available in 15, 30, and 55 gallon drum sizes

## industries

- food and beverage
- Industrial
- agriculture

## specs

- **power type**..... water and electric
- **discharge line length/diameter**.....25 ft. (7.6 m) hose, with 3/4 in. (19 mm) inside diameter
- **flow rate (produced by unit)**.....9-17 gal/min (34.1-64.4 l/min)
- **timer operation type**.....repeat cycle (PLC controlled)
- **water usage**.....  
30 second triple rinse cycle - 13.5-25.5 gallons (51.1-96.5 liters)  
60 second triple rinse cycle - 27-51 gallons (102.2-193.1 liters)
- **nozzle type**.....stainless steel spinner
- **tubing / fitting size**.....facility connection to water supply box: 1/2 in. FNPT

## requirements

- **water requirements**.....  
minimum flow at water source: 9 gal/min (34.1/min)  
**note:** If flow is less than 9 GPM, consider the boosted version
- **liquid temperature range**.....40-190° F (4.4-87.8° C)
- **electrical requirements**.....120 VAC at 60 Hz, 2 amps (GFCI protected outlet)
- **operating voltage**.....120 VAC
- **chemical compatibility**.....this unit is designed to function with water only



how to buy



800 567 5420 | sales@foamit.com