


Pre-Mix Electric Foam Unit

FI-JR

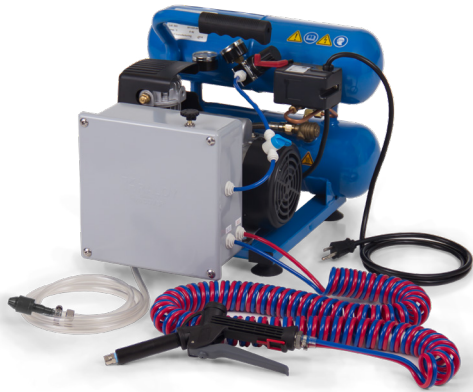

Features

- Draws from pre-mixed solution
- Powered by electricity (120 VAC)
- 25 ft. (7.6 m) coiled twin-line tubing for convenient use
- 65 degree fan tip for increased coverage
- On-board compressor
- Compact design

Options

- Pump seals
 - 3 types (Santoprene, Viton, or Kalrez)

Industries

- Institutional
- Food and Beverage
- Manufacturing

The Good Stuff

- **On-board air compressor**
With an on-board compressor, this unit brings consistent foam output to areas where compressed air isn't available
- **Portable power**
Equipped for 120 vac, plug-in power: foam clean anywhere
- **Long, lightweight, and tangle free**
Unit comes with 25 ft. of coiled discharge hose to maximize your reach

Specs

- Power type electricity
- Chemical pickup type draws from pre-mixed solution
- Number of products unit can draw from one product
- Suction line length/diameter 6 ft. (1.8 m) hose with 1/4 in. (6.4 mm) inside diameter
- Discharge hose diameter/length 25 ft. (7.6 m) coiled twin-line tubing, with 1/4 in. (6.4 mm) outside diameter
- Discharge wand/tip type polypropylene trigger handle with 65° fan tip
- Output distance 4-6 feet (1.2-1.8 m)
- Output volume 6 gal/min (22.7 l/min) of foam
- Flow rate 1 gal/min (3.8 l/min)
- Pump seals Santoprene, Viton, or Kalrez

Requirements

- Liquid temperature range 40-100 °F (4.4-37.8 °C)
- Electrical requirements 120 VAC at 60 Hz, 10 amps (GFCI protected outlet)
- Operating voltage 120 VAC
- Chemical compatibility chemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.



How to Buy



800 567 5420 | sales@foamit.com