


Central Dual Foam System

FI-STDF

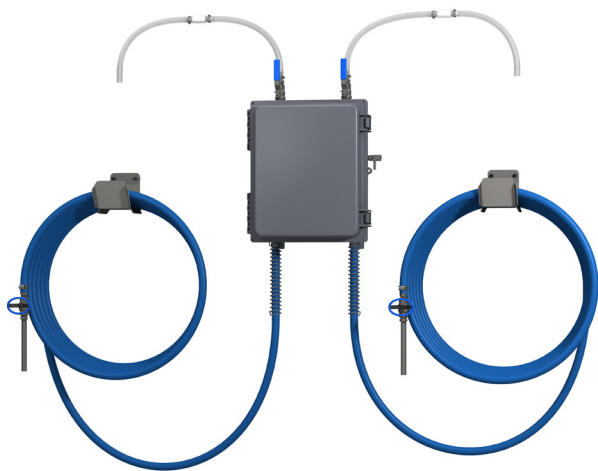

Features

- Drop station for central foam system
- Pump and nozzles sold separately
- Two foam systems built inside a shared enclosure
 - Systems must run independently
- Powered by compressed air
- Stainless steel ball valve and wand
- Stainless steel fluid fittings
- Ability to add padlock to box
- Includes stainless steel hose hanger

Options

- Pump sold separately
- Color coding
 - Discharge hose – 4 colors (BL, GN, YL, RD)

Industries

- Food and beverage
- Manufacturing



how to buy

The Good Stuff

- **Secure central chemical location**
Keep chemistry secure, away from the production floor; no need to refill containers, chemistry given on demand
- **No refills**
One location to titrate consistent chemical
- **On demand chemical**
Save time and labor, just grab the hose and foam, it's that simple

Specifications

- Power typecentral system
- Chemical pickup type..... supplied with pre-mixed solution
from a central station
- Number of products unit can draw from.....two products
- Discharge line length/diameter.....50 ft. (15 m) hose with
3/4 in. (19 mm) inside diameter
- Discharge wand/tip type7 in. (17.8 cm) stainless steel wand
with zero tip and ball valve
- Output distance.....25-30 ft. (7.6-9.1 m)
- Output volume 20-45 gal/min (75.7-170.3 l/min)
- Flow rate..... 2 gal/min (7.6 l/min)
- Product height18 in. (45.7 cm)
- Tubing/fitting sizes..... 4 ft. (1.2 m) chemical inlet hose with 1/2 in.
(12.7 mm) inside diameter and 1 lb check valve

Requirements

- Compressed air requirements..... 40-80 psi (2.8-5.5 bar) with
5-10 cfm (141.6-283.2 l/min)
- Liquid temperature range40-100 ° F (4.4-37.8 ° C)
- Central system requirements.....pre-mixed solution must be
supplied by a properly sized header system
at 2 GPM and 40 to 80 psi (2.8 to 5.5 bar)
- Chemical compatibilitychemical products
used with this equipment must be formulated for this type of
application and compatible with unit materials and pump seals. For
more information on chemical compatibility, consult the manufacturer
or SDS for your product or contact our customer service department.



800 567 5420 | sales@foamit.com