


central dual foam system

FI-STDF

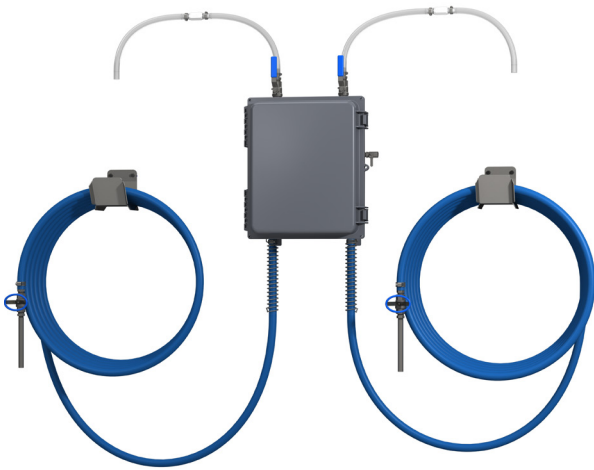

the good stuff

- **secure central chemical location**
keep chemistry secure, away from the production floor; no need to refill containers, chemistry given on demand,
- **no refills**
one location to titrate consistent chemical.
- **on demand chemical**
save time and labor, just grab the hose and foam, it's that simple.

Features

- drop station for central foam system
- pump and nozzles sold separately
- two foam systems built inside a shared enclosure
– systems must run independently
- powered by compressed air
- stainless steel ball valve and wand
- stainless steel fluid fittings
- ability to add padlock to box
- includes stainless steel hose hanger

options

- pump sold separately
- Color coding:
Discharge hose – 4 colors (BL, GN, YL, RD)

industries

- food and beverage
- manufacturing



how to buy

specifications

- **power type**central system
- **chemical pickup type** supplied with pre-mixed solution
from a central station
- **number of products unit can draw from**two products
- **discharge line length/diameter:** 50 ft. (15 m) hose,
with 3/4 in. (19 mm) inside diameter
- **discharge wand/tip type**7 in. (17.8 cm) stainless steel wand
with zero tip and ball valve
- **output distance**.....25-30 ft. (7-9 m)
- **output volume**..... 20-45 gal/min (75-170 l/min)
- **flow rate**..... 2 gal/min (7.6 l/min)
- **product height**18 inches (45.7 cm)
- **tubing/fitting sizes**.....4 ft. (1.2 m) chemical inlet hose
with 1/2 in. (12.7 mm) inside diameter and 1lb check valve

requirements

- **compressed air requirements**.....40-80 psi (3-5 bar)
with 5-10 cfm (141-283 l/min)
- **liquid temperature range** 40-100 ° F (4.4-37 ° C)
- **Central system requirements**.....Pre-mixed solution
must be supplied by a properly sized header system at 2 gpm
and 40 to 80 psi (3 to 5 bar).
- **chemical compatibility**.....chemical products used with this
equipment must be formulated for this type of application
and compatible with unit materials and pump seals. For more
information on chemical compatibility, consult the manufac-
turer or SDS for your product or contact our customer service
department.