


# twin-line pre-mix foam unit

FI-TL

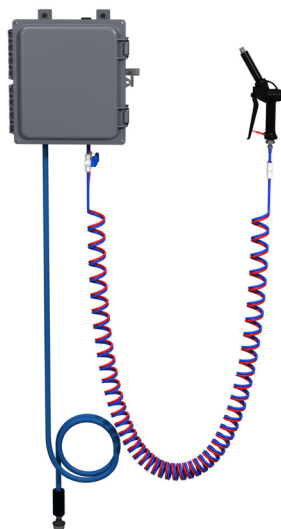

## features

- draws from pre-mixed solution
- powered by compressed air
- compact design for easy use
- 25 foot (7.6 meter) coiled discharge tubing
- 65 degree fan tip for increased coverage

## options

- pump seals
  - 3 types (Santoprene, Viton, Kalrez)

## industries

- institutional
- food and beverage
- manufacturing

## the good stuff

- **long, lightweight, and tangle free**  
unit comes with 25 ft. of coiled discharge hose to maximize your reach
- **heavy duty trigger wand**  
the polypropylene trigger gun is easy-to-use and highly durable, with a 65 degree fan tip for increased coverage
- **pulls pre-mixed product**  
draws product from pre-mixed solution, just drop your suction line and go

## specs

- power type .....compressed air
- chemical pickup type.....draws from pre-mixed solution
- number of products unit can draw from .....one product
- suction line length/diameter .....8 ft. (2.4 m) hose with  
3/8 in. (9.5 mm) outside diameter
- discharge line length/diameter .....25 ft. (7.6 m) twin line tubing,  
with 1/4 in. (6.35 mm) inside diameter  
(coiled and bonded)
- discharge wand/tip type ..... polypropylene trigger handle  
with 65 degree fan tip
- output distance.....4-6 feet (1.2-1.8 m)
- output volume .....6 gal/min (22.7 l/min)
- flow rate .....1 gal/min (3.8 l/min)
- pump seals ..... Santoprene, Viton, or Kalrez

## requirements

- compressed air requirements.....40-80 psi (2.8-5.5 bar)  
with 5-10 cfm (141.6-283.2 l/min)
- liquid temperature range.....40-100 ° F (4.4-37.8 ° C)
- chemical compatibility..... chemical products  
used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.



*how to buy*



800 567 5420 | [sales@foamit.com](mailto:sales@foamit.com)