


Twin-Line Pre-Mix Foam Unit

FI-WL-LVTL

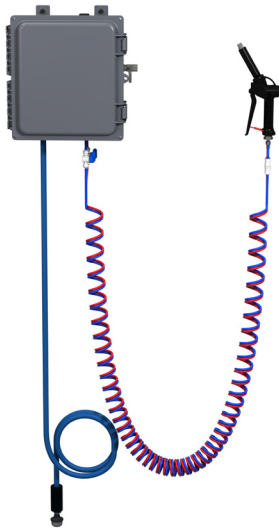

Features

- Draws from pre-mixed solution
- Powered by compressed air
- Compact design for easy use
- 25 foot (7.6 meter) coiled discharge tubing
- 65 degree fan tip for increased coverage

Options

- Pump seals
 - 3 types (Santoprene, Viton, Kalrez)

Industries

- Institutional
- Food and Beverage
- Manufacturing

The Good Stuff

- **Long, lightweight, and tangle free**
Unit comes with 25 ft. of coiled discharge hose to maximize your reach
- **Heavy duty trigger wand**
The polypropylene trigger gun is easy-to-use and highly durable, with a 65 degree fan tip for increased coverage
- **Pulls pre-mixed product**
Draws product from pre-mixed solution, just drop your suction line and go

Specs

- Power typecompressed air
- Chemical pickup typedraws from pre-mixed solution
- Number of products unit can draw from.....one product
- Suction line length/diameter8 ft. (2.4 m) hose
with 3/8 in. (9.5 mm) outside diameter
- Discharge line length/diameter25 ft. (7.6 m) twin line tubing,
with 1/4 in. (6.4 mm) inside diameter
(coiled and bonded)
- Discharge wand/tip type polypropylene trigger handle
with 65 degree fan tip
- Output distance.....5-6 feet (1.5-1.8 m)
- Output volume6 gal/min (22.7 l/min)
- Flow rate.....1 gal/min (3.8 l/min)
- Pump seals Santoprene, Viton, or Kalrez

Requirements

- Compressed air requirements.....40-80 psi (2.8-5.5 bar)
with 5-10 CFM (141.6-283.2 l/min)
- Liquid temperature range40-100 ° F (4.4-37.8 ° C)
- Chemical compatibility chemical products used with this equipment
must be formulated for this type of application and compatible
with unit materials and pump seals. For more information on
chemical compatibility, consult the manufacturer or SDS for
your product or contact our customer service department.



How to Buy



800 567 5420 | sales@foamit.com