


Footwear Sanitizing Unit

SS2

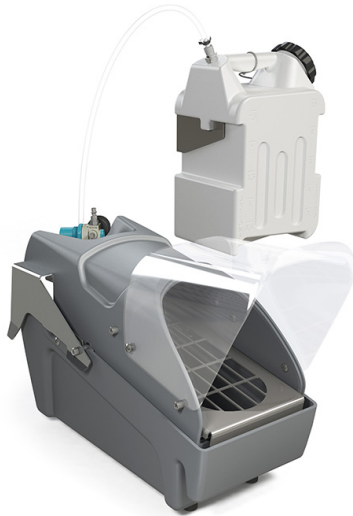

Features

- Easy-to-use sanitation for entryways and transition zones
- Low-moisture system
- Air operated pump delivers a consistent amount of sanitizer per spray
- Spray pattern ensures even coverage across shoe sole
- Collection basin is easy to access or swap out for cleaning
- Spray guard prevents overspray
- Draws from pre-mixed solution
- Includes 2.5 gallon jug with suction hose

Industries

- Institutional
- Food and Beverage
- Manufacturing
- Aviation
- Agriculture
- Remediation

The Good Stuff

- **Easy to use, easy to maintain**
Just step and go; sanitizer is evenly applied to footwear. Collection basin is easy to access or swap out for cleaning
- **Low moisture**
Helps keep moisture out of unwanted areas while still providing an effective sanitation on your shoe sole
- **Transition zones**
Effective sanitation in high traffic entryways or transition zones

Specs

- Power type.....compressed air
- Chemical pickup typedraws from pre-mixed solution
- Number of products unit can draw fromone product
- Suction line length/diameter.....3 ft (0.9 m) clear hose with 1/4 in (6.4 mm) inside diameter
- Output volume.....0.2 oz. (5.91 mL)
- Flow rate.....0.2 oz. (5.91 mL)
- Pump seals Viton
- Number of nozzles..... 4 nozzles

Requirements

- Compressed air requirements 40-60 psi (2.8-4.1 bar) with 1 CFM (28.3 l/min)
- Liquid temperature range.....40-100 ° F (4.4-37.8 ° C)
- Chemical compatibilitychemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or sds for your product or contact our customer service department.



How to Buy



800 567 5420 | sales@foamit.com